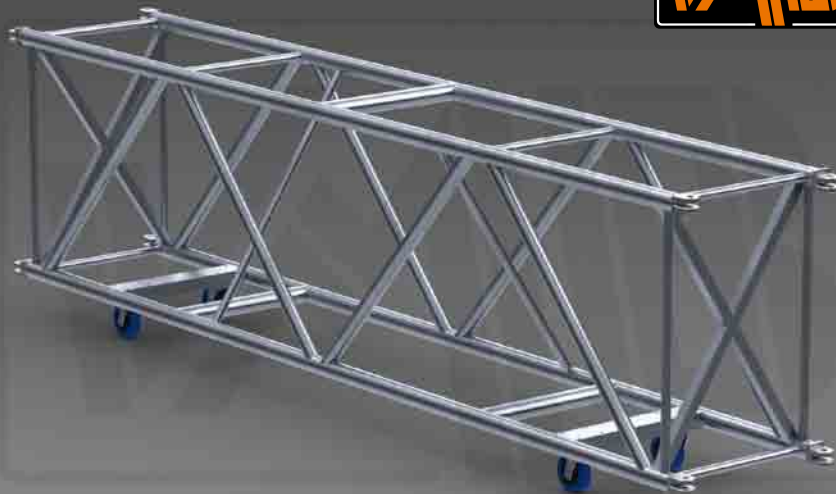


Tabla de cargas SUPERTRUSS 76x52 / 76x52 SUPERTRUSS Load chart			Características técnicas / Technical data		
LONGITUD (m) / LENGHT	CARGA CENTRADA (Kg) / CENTRE POINT LOAD	CARGA UNIF. REPARTIDA (Kg) / UNIFORMLY DISTRIBUTED LOAD	Tramo recto SUPERTRUSS 76x52 / Straight section 76x52 SUPERTRUSS	Truss 76x52 cm	
1	2620	4000	Longitud del tramo truss / Truss section lenght	3 m	
2	2620	4000			
3	2620	4000			
4	2620	4000	Tipo de unión / Union type	Unión Rótula-Spigot / Spigot union	
5	2620	4000	Diámetro tubos principales y espesor / Main pipe diameter & wall thickness	Ø50 x 4 mm	
6	2620	4000			
7	2620	4000	Diámetro tubos auxiliares y espesor / Brace diameter & wall thickness	Ø40 x 3,5mm / Ø25 x 3,5mm	
8	2620	4000			
9	2620	4000	Peso de la unidad / Unit weight	42,8 kg	
10	2330	3664			
11	2080	3400	Material de construcción: Aluminio / Construction material: Aluminium	Al EN AW-6082 T6	
12	1910	3132			
13	1750	2864	 		
14	1580	2664			
15	1500	2464			
16	1410	2332			
17	1325	2144			
18	1250	2000			
19	1150	1824			
20	1080	1736			
21	1000	1600			
22	875	1400			
23	790	1268			
24	720	1152			
25	665	1064			
26	580	936			
27	510	840			
28	475	720			
29	420	640			
30	375	600			

Ref.: TRS-76/3

Pasadores incluidos /
Pins included

Ref.: TRS-76/3

Pasadores incluidos /
Pins included