



ROOF SYSTEMS SISTEMAS TECHADOS TRUSS RS-TE10/8



10 x 8m MOTORIZED ROOF SYSTEM | TECHADO TRUSS MOTORIZADO 10 x 8m


SYSTEM DESCRIPTION:

Double pitch roof structure, 10m width and 8m depth. Four TE-30M motorized truss towers for lifting, at a maximum height of 7m. Based on 40x40cm and 29x29cm standard trusses, with a uniformly distributed load of 3000kg (only loading on the perimeter).

DESCRIPCIÓN:

Estructura truss con techado a 2 aguas, de 10m de boca de escenario, y 8m de profundo.

Elevación motorizada mediante cuatro torres estructurales TE-30M, altura máxima 7m. Principalmente construida con trusses estándar de 40x40cm y 29x29cm unión cónica. Carga máxima repartida 3000kg (solo cargar en el perímetro).

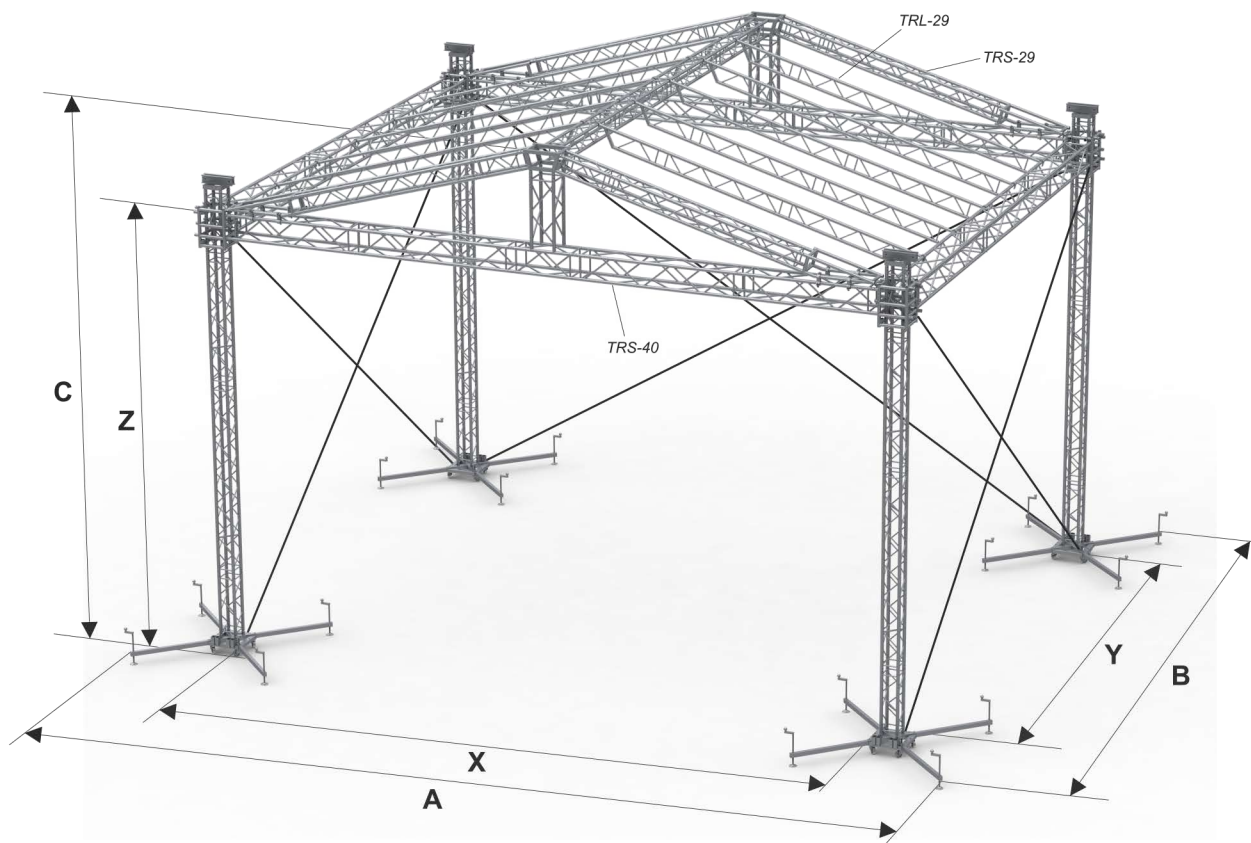

Component parts | Componentes:

- 4 x TE-30M
- 4 x TRS-40/2,5
- 6 x TRS-40/2
- 4 x TRS-40/3
- 2 x CU-T40/29Izq
- 2 x CU-T40/29Der
- 16 x AC-050
- 2 x TRS-40/T10x8M
- 2 x TPC-4S
- 4 x TRS-29/0,75
- 4 x TRS-29/2
- 4 x TRS-29/3
- 10 x TRL-29/2
- 10 x TRL-29/2bayU
- 10 x TTRL-29/PA
- 4 x ES1/2TMSS
- 4 x SM-40A
- Chain hoist:**
- 4 x DC-D8/F2
- 1 x PLE-30/04

Technical specifications | Características técnicas

Dimensions Dimensiones:	X: 10m	A: 12,80m	Optional accessories: Accesorios opcionales: PA soundwings / Guy wires / Chain hoist / Controllers Alas laterales para PA / Cables tensores / Motores / Controladores	
	Y: 8m	B: 10,80m		
	Z: 7m	C: 8,50m		
Max. Load Carga máxima:	3000kg Uniformly distributed load <u>only on the perimeter</u> 3000kg carga uniformemente repartida <u>solo en perímetro</u>			
Towers Torres:	4 x TE-30M structural lifting towers 4 x Torres estructurales TE-30M			
Truss structure Truss:	40x40cm Square truss for the perimeter Truss cuadrado 40x40cm en el perímetro			
Saddle roof Techado 2 aguas:	29x29cm Square and ladder truss for the roof Truss cuadrado 29x29cm, cerchas en paralelo 29cm			



PRO LIFTS S.L. Valencia, Spain
www.vmb.es | info@prolifts.es