



ROOF SYSTEMS SISTEMAS TECHADOS TRUSS RS-TE12/10




12 x 10m MOTORIZED ROOF SYSTEM | TECHADO TRUSS MOTORIZADO 12 x 10m

SYSTEM DESCRIPTION:

Double pitch roof structure, 12m width and 10m depth. Four TE-30M motorized truss towers for lifting, at a maximum height of 7m. Based on 40x40cm and 29x29cm standard trusses, with a uniformly distributed load of 2600kg (only loading on the perimeter).

DESCRIPCIÓN:

Estructura truss con techado a 2 aguas, de 12m de boca de escenario, y 10m de profundo.
Elevación motorizada mediante cuatro torres estructurales TE-30M, altura máxima 7m. Principalmente construida con trusses estándar de 40x40cm y 29x29cm unión cónica. Carga máxima repartida 2600kg (solo cargar en el perímetro).

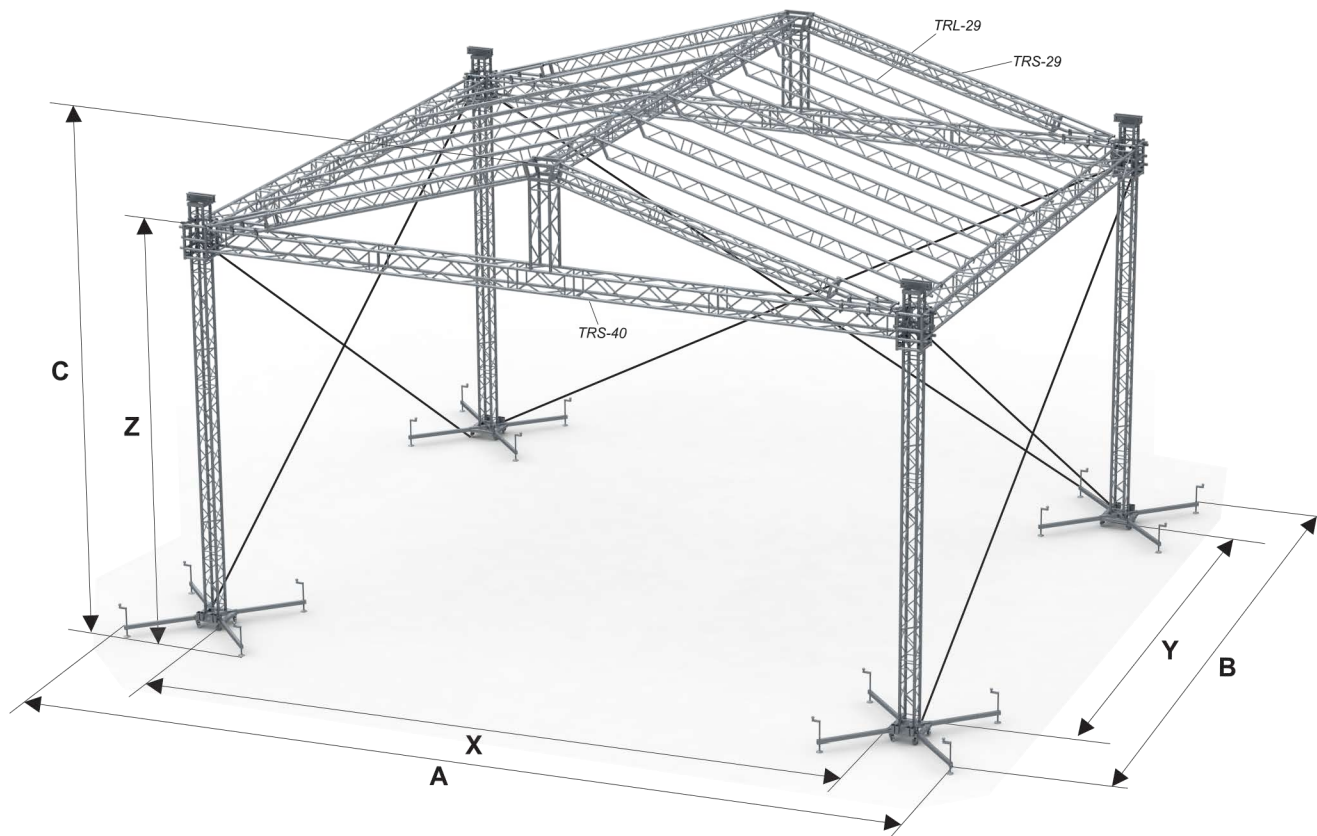

Component parts | Componentes:

- 4 x TE-30M
- 4 x TRS-40/2,5
- 10 x TRS-40/2
- 4 x TRS-40/3
- 2 x CU-T40/29Izq
- 2 x CU-T40/29Der
- 16 x AC-050
- 2 x TRS-40/T12x10M
- 2 x TPC-4S
- 4 x TRS-29/0,75
- 4 x TRS-29/1
- 5 x TRS-29/2
- 4 x TRS-29/3
- 12 x TRL-29/3
- 12 x TRL-29/2.1bayU
- 12 x TTRL-29/PA
- 4 x ES1/2TMSS
- 4 x SM-40A
- Chain hoist:**
- 4 x DC-D8/F2
- 1 x PLE-30/04

Technical specifications | Características técnicas

Dimensions Dimensiones:	X: 12m	A: 14,90m	Optional accessories: Accesorios opcionales: PA soundwings / Guy wires / Chain hoist / Controllers Alas laterales para PA / Cables tensores / Motores / Controladores
	Y: 10m	B: 12,90m	
	Z: 7m	C: 8,70m	
Max. Load Carga máxima:	2600kg Uniformly distributed load <u>only on the perimeter</u> 2600kg carga uniformemente repartida <u>solo en perímetro</u>		
Towers Torres:	4 x TE-30M structural lifting towers 4 x Torres estructurales TE-30M		
Truss structure Truss:	40x40cm Square truss for the perimeter Truss cuadrado 40x40cm en el perímetro		
Saddle roof Techado 2 aguas:	29x29cm Square and ladder truss for the roof Truss cuadrado 29x29cm, cerchas en paralelo 29cm		



PRO LIFTS S.L. Valencia, Spain
www.vmb.es | info@prolifts.es